

### FEATURES

Fiberglass Armor is a reinforced structural polyester laminate that exhibits unique bullet resisting characteristics. These flat, opaque panels are press molded between plates at high pressure and elevated temperature. Fiberglass structural armor is designed to progressively delaminate as a bullet penetrates. The hard surface and toughness of the material cause the bullet to distort and flatten. As the bullet penetrates, the layers of (fiberglass) reinforcement within the laminate pull apart in a controlled manner such that the energy of the bullet is dissipated within the laminate. More energy is consumed as the bullet penetrates the high-strength glass fibers. No spalling occurs.

### MARKET SERVED

| Teller Counters | Gas Station | Convenience Store | Pay Counters | Remote Electronic Building | Secure Rooms and Buildings | Judge Benches | Reception Areas |

### SHEET SIZES AVAILABLE

| 4' X 8' | Custom sizes available under 4' x 8'

### PROPERTIES & SPECIFICATIONS

<b>Protection</b>	5.56 mm 55 gram FCJ
<b>Ballistic Data</b>	Velocity 1: 3080 ft/s Velocity 2: 3185 ft/s
<b>Shots</b>	5
<b>Light Transmission</b>	0.0%
<b>Thickness</b>	1 1/8"
<b>Weight</b>	11.7 lbs/sqft
<b>Standard Color</b>	White
<b>Tensile Strength</b>	45 KSI
<b>Tensile Modulus</b>	3.75 x 10 <sup>6</sup> PSI
<b>Flexural Strength</b>	70 KSI
<b>Flexural Modulus</b>	2.7 x 10 <sup>6</sup> PSI
<b>Compressive Strength</b>	70 KSI
<b>IZOD Impact Strength</b>	52 Ft. Lb./In.
<b>Water Absorption</b>	<1.4% By Weight
<b>Specific Gravity</b>	2
<b>Barcol Hardness</b>	50
<b>CoEf. Of Thermal Exp.</b>	2 In./°C x 10 <sup>-5</sup>
<b>Thermal Conductivity</b>	2 BTU/Hr/Ft. <sup>2</sup> /In./°F

### BALLISTIC AND FORCED ENTRY RATING


- U.L 752 / Level 7
- Class IV Forced Entry ASTM F1233-98

### STANDARDS

- UL-94 V0 Flame Rating
- Sound Insulation Rating ASTM E413-87
- One Hour Fire Rating ASTM E119-98

### BALLISTIC FIBERGLASS ARMOR

#### PRODUCT: BGAA-07

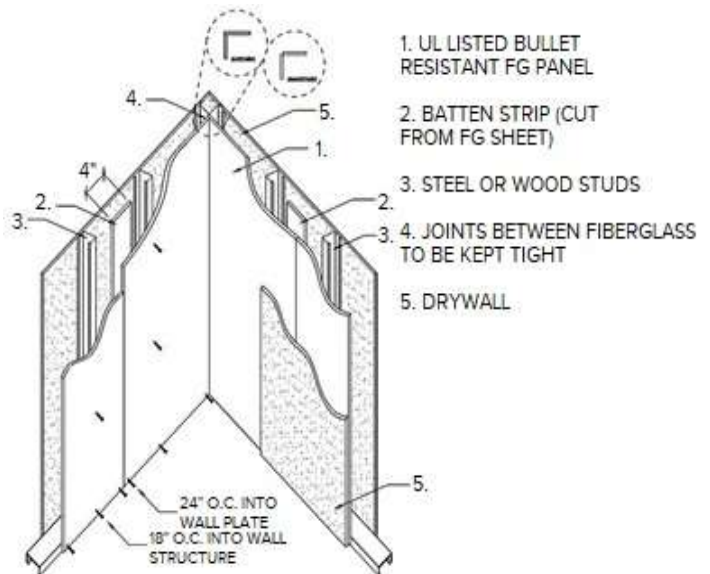

### INSTALLATION

- For cutting, carbide or ceramic grit saw blades are recommended. Use carbide tooling when drilling, spot facing, or counter boring
- Butt joints are weak. To reinforce, use 4" strip of same material. No rigid high-density material should be used adjacent to panel's inner surface. Allow a minimum gap of 1/4"

### STANDARD WARRANTY

12-month limited warranty. Does not cover damage from neglect, abuse, vandalism, improper maintenance, or any other cause not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, defective in quality, or workmanship at time of delivery. TSS is not responsible for (re)installation expenses or any direct or indirect losses which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. Buyer is responsible for any consequences from product use.

### Bullet Guard

P: 800.233.5632 | info@bulletguardmail.com | Since 1976 | 3963 Commerce Dr. W. West Sacramento, CA 95691

Proprietary information not for public distribution